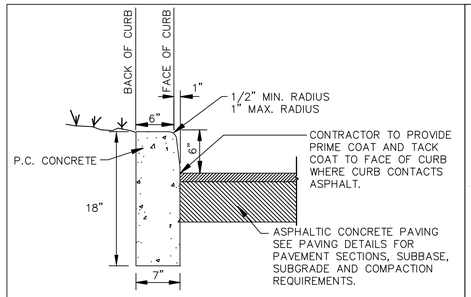

HEADER CURB

N.T.S.



PAINTED STOP BAR

(N.T.S.)

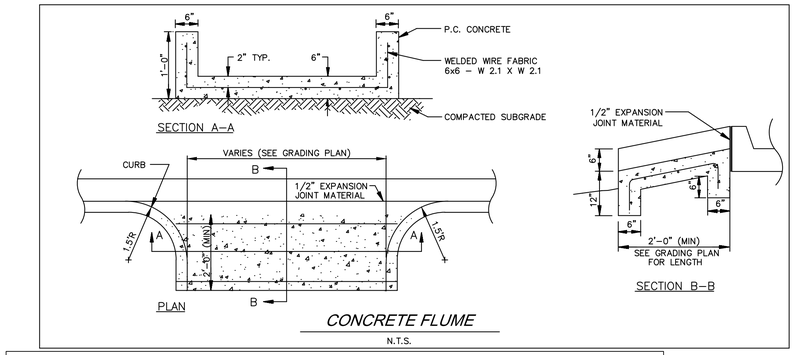

CONCRETE FLUME

N.T.S.

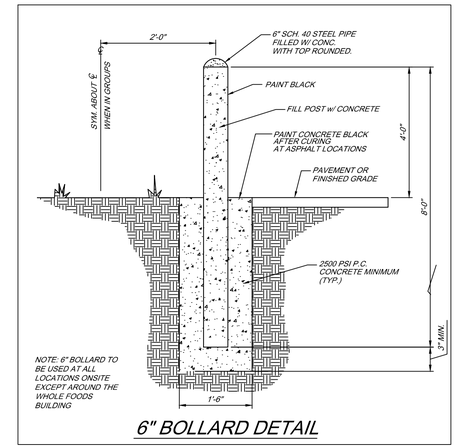

6" BOLLARD DETAIL

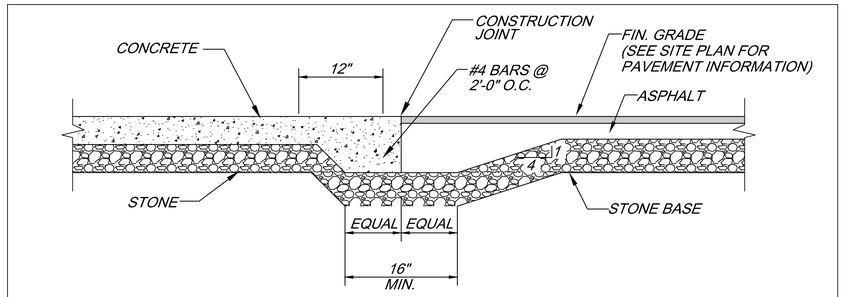

CONCRETE /ASPHALT JOINT DETAIL

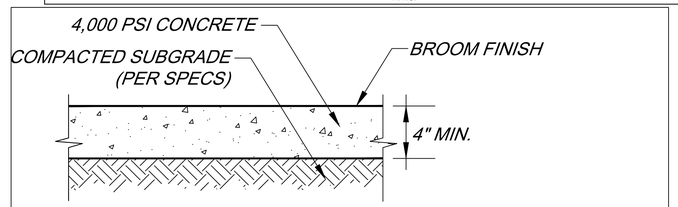

1. CONTRACTION JOINTS SPACE TO BE EQUAL TO SIDEWALK WIDTH
2. EXPANSION JOINTS 10' O/C
3. ALL JOINTS SEALED PER SPEC

SIDEWALK DETAIL

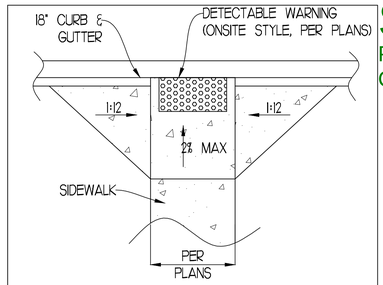

SIDEWALK RAMP DETAIL 2

N.T.S.

SHEET 3

PROPOSED SITE CONDITIONS

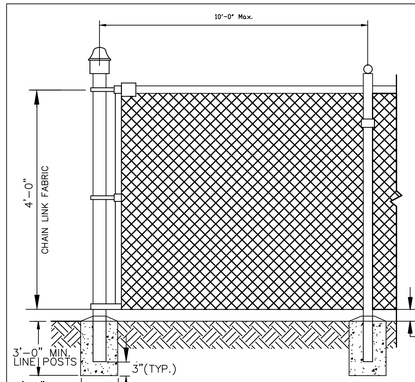

CHAIN LINK FENCE 7A

N.T.S.

4' VINYL COATED CHAIN LINK FENCE SPECIFICATION

CHAIN LINK FENCE SHALL BE 4' HEIGHT WITH THERMALLY FUSED (ASTM F668-2B) VINYL FABRIC AS MANUFACTURED BY ANCHOR FENCE OR APPROVED EQUAL. THE STEEL CORE WIRE SHALL BE GALVANIZED IN ACCORDANCE WITH ASTM A-641-7A, AND FENCE SHALL BE BLACK. CHAIN LINK MESH SHALL BE 2" OPENINGS AND 9 GAUGE WIRE. FABRIC SELVAGE SHALL BE KNUCKLED AND KNUCKLED. FRAMING SHALL BE HOT DIPPED GALVANIZED PER ASTM. PRIOR TO VINYL COATING. THICKNESS OF VINYL COATING SHALL BE 10-14 MILS APPLIED BY FUSION BONDING, COLOR TO MATCH FABRIC. THE FENCE SHALL HAVE A CONTINUOUS 1-5/8" O.D. TOP RAIL AND A 6 GAUGE VINYL COATED CONTINUOUS BOTTOM TENSION WIRE.

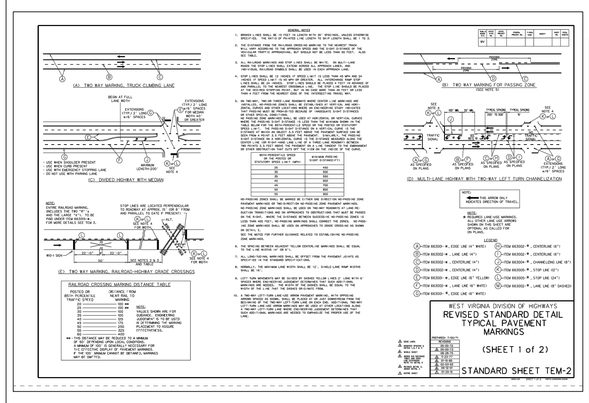

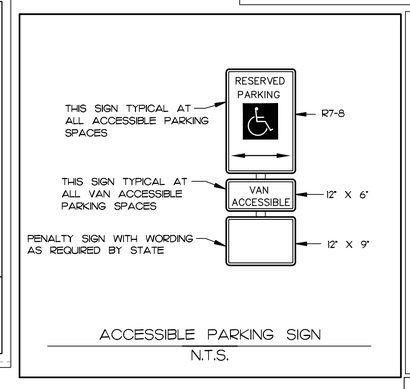

ACCESSIBLE PARKING SIGN

N.T.S.

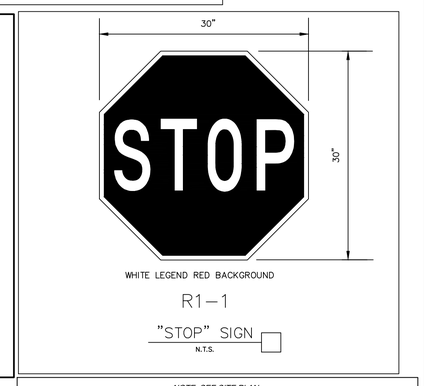

R1–1

"STOP" SIGN

N.T.S.

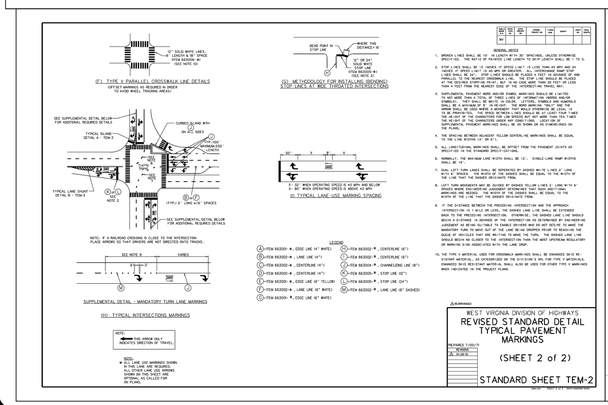

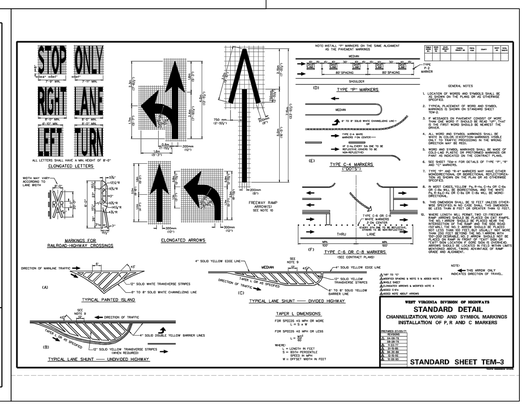

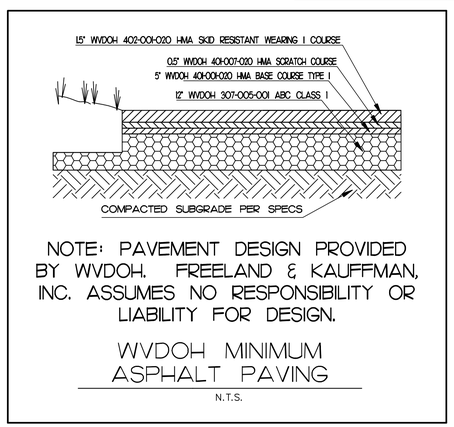

NOTE: PAVEMENT DESIGN PROVIDED BY WVDOH. FREELAND & KAUFFMAN, INC. ASSUMES NO RESPONSIBILITY OR LIABILITY FOR DESIGN.

WVDOH MINIMUM ASPHALT PAVING

N.T.S.

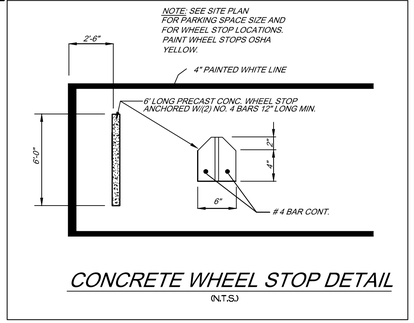

CONCRETE WHEEL STOP DETAIL

(N.T.S.)

SITE DETAILS

REVISIONS	BY

FREELAND and KAUFFMAN, INC.
Engineers * Landscape Architects
209 West Stone Avenue
Greenville, South Carolina 29609
864-233-5497
fax 864-233-5915
NC LICENSE NO. C-1532

PROPOSED RETAIL
MORGANTOWN, WV

FEOH REALTY, LLC
3280 UNIVERSITY AVENUE
SUITE 1
MORGANTOWN, WV 26505
(304)-599-4929

DRAWN	LRS
CHECKED	BTS
DATE	11/6/2015
SCALE	
DRAWING	10